

Work Order ID 100137

Thursday, April 18, 2013 10:31:25 AM

100137

Page 1

Item ID: D3997-1

Accept

N900040100Setup Start ***NS1***

Revision ID:

Stop ***NS2***

Item Name: Placard

Start Date: 4/18/2013 Start Qty: 12.00

12

Cust Item ID:

Required Date: 4/25/2013 Req'd Qty: 12.00

12

Customer:

Reference:

Approvals:

Process Plan: *MF*Date: *13-4-18*

Tooling:

Date:

Run Start ***NR1***

QC:

Date:

SPC (Y/N):

Date:

Stop ***NR2***Sequence ID/
Work Center IDOperation
DescriptionSet Up/
Run Hours

Tool ID

Tool #

Plan
CodeAccept
QtyReject
QtyReject
NumberInsp.
Stamp

Draw Nbr

Revision Nbr

D3997

A

100

0.00

100

Purchasing

Memo

0.00

Purchasing

Issue P/O: *19617*
Manufacture as per Bwg D3997
Possible Supplier: Studio Lettrage
Material release note required*PL 13-04-18*

110

Receive & Inspect for Damage & Mat'l Certs

0.00

110

Packaging

Memo

0.00

Packaging

PL 13/4/26 (12)

120

QC6- Inspect dimensions to drawing

0.00

120

QC

Memo

0.00

Quality Control

*DAS
27
26
134.26**12*

NCR: Yes / No

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: _____ Date: _____

QA Closed: _____ Date: _____

Work Order: _____ Part No. _____ NCR No. _____				DISPOSITION Rework <input type="checkbox"/> Scrap <input type="checkbox"/> Use-as-is <input type="checkbox"/> Work Order Update <input type="checkbox"/>		AGAINST DEPARTMENT/PROCESS <div style="display: flex; justify-content: space-between;"> <div> Skid-tube <input type="checkbox"/> Machining <input type="checkbox"/> Thermoforming <input type="checkbox"/> Large Fab <input type="checkbox"/> </div> <div> Crosstube <input type="checkbox"/> Small Fab <input type="checkbox"/> Finishing <input type="checkbox"/> Composite <input type="checkbox"/> </div> <div> Water Jet <input type="checkbox"/> Prod. Eng. Coord. <input type="checkbox"/> Rec/Store/Packaging <input type="checkbox"/> Supplier <input type="checkbox"/> </div> <div> Engineering <input type="checkbox"/> Quality <input type="checkbox"/> Other <input type="checkbox"/> </div> </div>					
Root Cause	Date	Step	Qty	Description of work order update or Non-conformance	Initial Chief Eng	Action Description	Sign & Date	Verification	QC Inspector		
Doc/Data											
Equip/Tooling											
Operator											
Material											
Setup											
Other											
Process											
Supplier											
Training											
Unapproved											
FAULT CATEGORY											
Landing Gear <input type="checkbox"/> Bending <input type="checkbox"/> Centre Not Concentric to O/S <input type="checkbox"/> Cracks <input type="checkbox"/> Crushed/Crimped <input type="checkbox"/> Cuffs <input type="checkbox"/> Heat Treat <input type="checkbox"/> Inspection Strip in Tube <input type="checkbox"/> Ripples in Bend <input type="checkbox"/> Torque Waves in Extrusion <input type="checkbox"/> Turning Sequence <input type="checkbox"/> Wave/Twist in Tube			General <input type="checkbox"/> Bend <input type="checkbox"/> BOM/Route <input type="checkbox"/> Broken/Damaged <input type="checkbox"/> Burrs <input type="checkbox"/> Contamination <input type="checkbox"/> Countersink <input type="checkbox"/> Cut Too Short <input type="checkbox"/> Drill Holes <input type="checkbox"/> Drawing <input type="checkbox"/> Finish <input type="checkbox"/> Folio			<input type="checkbox"/> Grain <input type="checkbox"/> Hardware <input type="checkbox"/> Inspection Incomplete <input type="checkbox"/> Instructions Incomplete/Unclear <input type="checkbox"/> Maintenance <input type="checkbox"/> Mislabeled <input type="checkbox"/> Misread <input type="checkbox"/> Offset <input type="checkbox"/> Out of Calibration <input type="checkbox"/> Out of Sequence <input type="checkbox"/> Outside Dimensions			<input type="checkbox"/> Ovalized <input type="checkbox"/> Over/Under tolerance <input type="checkbox"/> Part Incorrect <input type="checkbox"/> Part Lost/Missing <input type="checkbox"/> Part Moved <input type="checkbox"/> Positioned Wrong <input type="checkbox"/> Power Loss/Surge <input type="checkbox"/> Pressure/Forced <input type="checkbox"/> Temperature/Cure <input type="checkbox"/> Weld <input type="checkbox"/> Wrong Stock Pulled <input type="checkbox"/> Other		

Work Order ID 100137

Thursday, April 18, 2013 10:31:25 AM

100137

Page 2

Item ID: D3997-1

Accept

N900040100Setup Start ***NS1***

Revision ID:

Item Name: Placard

Stop ***NS2***

Start Date: 4/18/2013 Start Qty: 12.00

12

Cust Item ID:

Required Date: 4/25/2013 Req'd Qty: 12.00

12

Customer:

Reference:

Approvals:

Process Plan:

Date:

Tooling:

Date:

Run Start ***NR1***

QC:

Date:

SPC (Y/N):

Date:

Stop ***NR2***Sequence ID/
Work Center IDOperation
DescriptionSet Up/
Run Hours

Tool ID

Tool #

Plan
CodeAccept
QtyReject
QtyReject
NumberInsp.
Stamp

130

Identify as per dwg & Stock Location: _____

0.00

130

Packaging

Memo

8244A

0.00

Packaging

13/4/29 (12)

140

QC21- Final Inspection - Work Order Release

0.00

140

QC

Memo

0.00

Quality Control

13/5/10

MF

13-4-29

NCR: Yes / No

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: _____ Date: _____

QA Closed: _____ Date: _____

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework <input type="checkbox"/> Scrap <input type="checkbox"/> Use-as-is <input type="checkbox"/> Work Order Update <input type="checkbox"/>	AGAINST DEPARTMENT/PROCESS <table style="width: 100%;"> <tr> <td>Skid-tube <input type="checkbox"/></td> <td>Crosstube <input type="checkbox"/></td> <td>Water Jet <input type="checkbox"/></td> <td>Engineering <input type="checkbox"/></td> </tr> <tr> <td>Machining <input type="checkbox"/></td> <td>Small Fab <input type="checkbox"/></td> <td>Prod. Eng. Coord. <input type="checkbox"/></td> <td>Quality <input type="checkbox"/></td> </tr> <tr> <td>Thermoforming <input type="checkbox"/></td> <td>Finishing <input type="checkbox"/></td> <td>Rec/Store/Packaging <input type="checkbox"/></td> <td>Other <input type="checkbox"/></td> </tr> <tr> <td>Large Fab <input type="checkbox"/></td> <td>Composite <input type="checkbox"/></td> <td>Supplier <input type="checkbox"/></td> <td></td> </tr> </table>	Skid-tube <input type="checkbox"/>	Crosstube <input type="checkbox"/>	Water Jet <input type="checkbox"/>	Engineering <input type="checkbox"/>	Machining <input type="checkbox"/>	Small Fab <input type="checkbox"/>	Prod. Eng. Coord. <input type="checkbox"/>	Quality <input type="checkbox"/>	Thermoforming <input type="checkbox"/>	Finishing <input type="checkbox"/>	Rec/Store/Packaging <input type="checkbox"/>	Other <input type="checkbox"/>	Large Fab <input type="checkbox"/>	Composite <input type="checkbox"/>	Supplier <input type="checkbox"/>	
Skid-tube <input type="checkbox"/>	Crosstube <input type="checkbox"/>	Water Jet <input type="checkbox"/>	Engineering <input type="checkbox"/>															
Machining <input type="checkbox"/>	Small Fab <input type="checkbox"/>	Prod. Eng. Coord. <input type="checkbox"/>	Quality <input type="checkbox"/>															
Thermoforming <input type="checkbox"/>	Finishing <input type="checkbox"/>	Rec/Store/Packaging <input type="checkbox"/>	Other <input type="checkbox"/>															
Large Fab <input type="checkbox"/>	Composite <input type="checkbox"/>	Supplier <input type="checkbox"/>																

Root Cause	Date	Step	Qty	Description of work order update or Non-conformance	Initial Chief Eng	Action Description	Sign & Date	Verification	QC Inspector
Doc/Data									
Equip/Tooling									
Operator									
Material									
Setup									
Other									
Process									
Supplier									
Training									
Unapproved									

FAULT CATEGORY

Landing Gear <input type="checkbox"/> Bending <input type="checkbox"/> Centre Not Concentric to O/S <input type="checkbox"/> Cracks <input type="checkbox"/> Crushed/Crimped <input type="checkbox"/> Cuffs <input type="checkbox"/> Heat Treat <input type="checkbox"/> Inspection Strip in Tube <input type="checkbox"/> Ripples in Bend <input type="checkbox"/> Torque Waves in Extrusion <input type="checkbox"/> Turning Sequence <input type="checkbox"/> Wave/Twist in Tube	General <input type="checkbox"/> Bend <input type="checkbox"/> BOM/Route <input type="checkbox"/> Broken/Damaged <input type="checkbox"/> Burrs <input type="checkbox"/> Contamination <input type="checkbox"/> Countersink <input type="checkbox"/> Cut Too Short <input type="checkbox"/> Drill Holes <input type="checkbox"/> Drawing <input type="checkbox"/> Finish <input type="checkbox"/> Folio	<input type="checkbox"/> Grain <input type="checkbox"/> Hardware <input type="checkbox"/> Inspection Incomplete <input type="checkbox"/> Instructions Incomplete/Unclear <input type="checkbox"/> Maintenance <input type="checkbox"/> Mislabeled <input type="checkbox"/> Misread <input type="checkbox"/> Offset <input type="checkbox"/> Out of Calibration <input type="checkbox"/> Out of Sequence <input type="checkbox"/> Outside Dimensions	<input type="checkbox"/> Ovalized <input type="checkbox"/> Over/Under tolerance <input type="checkbox"/> Part Incorrect <input type="checkbox"/> Part Lost/Missing <input type="checkbox"/> Part Moved <input type="checkbox"/> Positioned Wrong <input type="checkbox"/> Power Loss/Surge	<input type="checkbox"/> Pressure/Forced <input type="checkbox"/> Temperature/Cure <input type="checkbox"/> Weld <input type="checkbox"/> Wrong Stock Pulled <input type="checkbox"/> Other
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Picklist Print

Thursday, April 18, 2013 10:31:25 AM

Page 1

Work Order ID: 100137

Parent Item: D3997-1

Parent Item Name: Placard

Start Date: 4/18/2013

Required Date: 4/25/2013

Start Qty: 12.00

Required Qty: 12.00

Comments: IPP rev A 10.01.12 new issue Prelim EC verified by:DD

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D3997-1P Placard		Purchased	No			100	Each	0.0000	1	12			

43/4/26 (12)

NCR: Yes / No

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: _____ Date: _____

QA Closed: _____ Date: _____

Work Order: _____	DISPOSITION Rework <input type="checkbox"/> Scrap <input type="checkbox"/> Use-as-is <input type="checkbox"/> Work Order Update <input type="checkbox"/>	AGAINST DEPARTMENT/PROCESS <div style="display: flex; justify-content: space-between;"> <div> Skid-tube <input type="checkbox"/> Machining <input type="checkbox"/> Thermoforming <input type="checkbox"/> Large Fab <input type="checkbox"/> </div> <div> Crosstube <input type="checkbox"/> Small Fab <input type="checkbox"/> Finishing <input type="checkbox"/> Composite <input type="checkbox"/> </div> <div> Water Jet <input type="checkbox"/> Prod. Eng. Coord. <input type="checkbox"/> Rec/Store/Packaging <input type="checkbox"/> Supplier <input type="checkbox"/> </div> <div> Engineering <input type="checkbox"/> Quality <input type="checkbox"/> Other <input type="checkbox"/> </div> </div>			
Part No. _____					
NCR No. _____					


Root Cause	Date	Step	Qty	Description of work order update or Non-conformance	Initial Chief Eng	Action Description	Sign & Date	Verification	QC Inspector
Doc/Data									
Equip/Tooling									
Operator									
Material									
Setup									
Other									
Process									
Supplier									
Training									
Unapproved									

FAULT CATEGORY


Landing Gear <input type="checkbox"/> Bending <input type="checkbox"/> Centre Not Concentric to O/S <input type="checkbox"/> Cracks <input type="checkbox"/> Crushed/Crimped <input type="checkbox"/> Cuffs <input type="checkbox"/> Heat Treat <input type="checkbox"/> Inspection Strip in Tube <input type="checkbox"/> Ripples in Bend <input type="checkbox"/> Torque Waves in Extrusion <input type="checkbox"/> Turning Sequence <input type="checkbox"/> Wave/Twist in Tube	General <input type="checkbox"/> Bend <input type="checkbox"/> BOM/Route <input type="checkbox"/> Broken/Damaged <input type="checkbox"/> Burrs <input type="checkbox"/> Contamination <input type="checkbox"/> Countersink <input type="checkbox"/> Cut Too Short <input type="checkbox"/> Drill Holes <input type="checkbox"/> Drawing <input type="checkbox"/> Finish <input type="checkbox"/> Folio	<input type="checkbox"/> Grain <input type="checkbox"/> Hardware <input type="checkbox"/> Inspection Incomplete <input type="checkbox"/> Instructions Incomplete/Unclear <input type="checkbox"/> Maintenance <input type="checkbox"/> Mislabeled <input type="checkbox"/> Misread <input type="checkbox"/> Offset <input type="checkbox"/> Out of Calibration <input type="checkbox"/> Out of Sequence <input type="checkbox"/> Outside Dimensions	<input type="checkbox"/> Ovalized <input type="checkbox"/> Over/Under tolerance <input type="checkbox"/> Part Incorrect <input type="checkbox"/> Part Lost/Missing <input type="checkbox"/> Part Moved <input type="checkbox"/> Positioned Wrong <input type="checkbox"/> Power Loss/Surge	<input type="checkbox"/> Pressure/Forced <input type="checkbox"/> Temperature/Cure <input type="checkbox"/> Weld <input type="checkbox"/> Wrong Stock Pulled <input type="checkbox"/> Other
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

DART AEROSPACE PART NUMBER	JOHN CAMERON AVIATION PART NUMBER
D3997-1	JCA-M47-P1
D3997-3	JCA-M47-P2

PART NUMBER	INSTALLATION INSTRUCTIONS
D3997-1	FOR AS350 AIRCRAFT - ADJACENT TO FUEL FILLER
D3997-3	FOR EC130 AIRCRAFT - ADJACENT TO FUEL FILLER

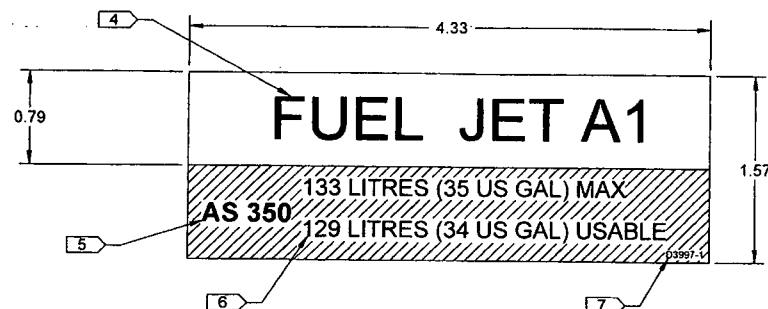

D3997-1 PLACARD

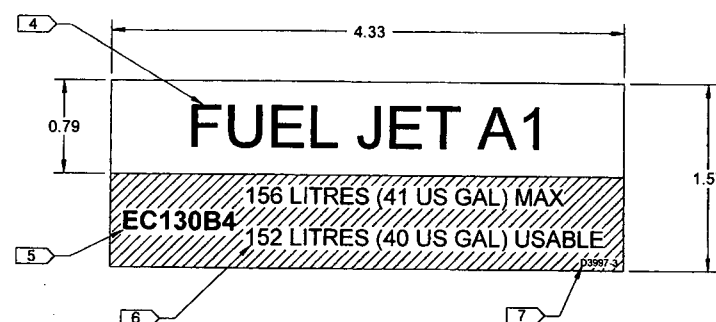

D3997-3 PLACARD

RELEASED
2010-01-11
nm

- NOTES:**
- 1) MATERIAL: 3M 7 MIL MASKING FILM #8522CP OR AVERY IPM #2031
 - 2) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 3) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 4) 36 PT FONT, BLACK TEXT ON WHITE BACKGROUND
 - 5) 16 PT BOLD FONT, WHITE TEXT ON BLACK BACKGROUND
 - 6) 14 PT FONT, WHITE TEXT ON BLACK BACKGROUND
 - 7) 6 PT FONT, WHITE TEXT ON BLACK BACKGROUND

A	NEW ISSUE		09.10.05
REV.		DESCRIPTION	BY DATE
DESIGN		DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA DRAWING NO. D3997 TITLE PLACARD	
DRAWN			
CHECKED			
MFG. APPR.			REV.
APPROVED			SHEET 1 OF
DE APPR.			SCALE
DATE	09.10.05		NTS

COPYRIGHT © 2009 BY DART AEROSPACE LTD
 THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS
 NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT THE
 WRITTEN PERMISSION FROM DART AEROSPACE LTD

DART AEROSPACE LTD
HAWKESBURY, ONTARIO, CANADA

DRAWING NO. **D3997** REV. A
SHEET 1 OF 6
TITLE **PLACARD** SCALE NTS

COPYRIGHT © 2009 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS
NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT
WRITTEN PERMISSION FROM DART AEROSPACE LTD

NCR: Yes / No

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: _____ Date: _____

QA Closed: _____ Date: _____

Work Order: _____ Part No. _____ NCR No. _____				DISPOSITION <div style="display: flex; justify-content: space-around;"> <div> <input type="checkbox"/> Rework <input type="checkbox"/> Scrap <input type="checkbox"/> Use-as-is <input type="checkbox"/> Work Order Update </div> <div> <input type="checkbox"/> Skid-tube <input type="checkbox"/> Machining <input type="checkbox"/> Thermoforming <input type="checkbox"/> Large Fab </div> <div> <input type="checkbox"/> Crosstube <input type="checkbox"/> Small Fab <input type="checkbox"/> Finishing <input type="checkbox"/> Composite </div> <div> <input type="checkbox"/> Water Jet <input type="checkbox"/> Prod. Eng. Coord. <input type="checkbox"/> Rec/Store/Packaging <input type="checkbox"/> Supplier </div> <div> <input type="checkbox"/> Engineering <input type="checkbox"/> Quality <input type="checkbox"/> Other </div> </div>	
--------------------------------------------------------------	--	--	--	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--

****Certificate of Conformity****

Customer:

Studio Lettuce

Purchase Order #:

19607

Packing Slip #:

Part#:

See desc

Serial #:

Description: D3997-31P x10

D3997-35P x10, D3997-37PK12

D3997-15 x10, D3997-1P x12

Quantity:

D3997-21P x10 D3997-41P x10

D3997-23P x10

Certification:

We hereby certify that:

1. The above the listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;
2. All work was accomplished in accordance with the Dart Aerospace Purchase Order;
3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.

Authority:

3M

APPROVAL: KAREN STE. MARIE **DATE:**

Signature:

Karen Ste. Marie

Title:

Project Coordinator April 24, 2013

Studio de Lettrage

210 Main Street W
Hawkesbury, Ontario K6A 2H6

INVOICE

Invoice No.: 19942
Date: 04/25/2013
Ship Date:
Page: 1
Re: Order No. WO9730

Sold to:

Dart Aerospace Ltd
1270 Aberdeen
Hawkesbury, Ontario K6A 1K7

Ship to:

Dart Aerospace Ltd
Hawkesbury, Ontario

Business No.: 82500 7651 RT0001

Item No.	Unit	Quantity	Description	Tax	Unit Price	Amount
		10	3M STICKER D3997-31P	H	2.5000	25.00
		1	SET UP	H	50.0000	50.00
		10	3M STICKER D3997-35P	H	2.5000	25.00
		1	SET UP	H	50.0000	50.00
		12	3M STICKER D3997-37P	H	2.0833	25.00
		1	SET UP	H	50.0000	50.00
		12	3M STICKER D3997-1P	H	2.0833	25.00
		1	SET UP	H	50.0000	50.00
		10	3M STICKER D3997-15P	H		25.00
		1	SET UP	H	50.0000	50.00
		10	3M STICKER D3997-21P	H	2.5000	25.00
		1	SET UP	H	50.0000	50.00
		10	3M STICKER D3997-23P	H	2.5000	25.00
		1	SET UP	H	50.0000	50.00
		10	3M STICKER D3997-41P	H	2.5000	25.00
		1	SET UP	H	50.0000	50.00
			PO#19617			
			H - HST 13%			
			HST			78.00
Studio de Lettrage HST: #825007651RT0001						
Shipped By: Tracking Number:						
Comment:					Total Amount	678.00
Sold By:						



Product & Instruction Bulletin 8522

Release I, Effective September 2008

See Bulletin Change Summary and end of Bulletin

This Bulletin now includes Instruction Bulletin 4.23

Scotchcal™ Changeable Opaque Imaging Media 8522

Product Description

Recommended Types of Graphics and End Uses

For Thermal Inkjet Printing

This durable, 7 mil, opaque, changeable film is optimized for use with selected thermal inkjet printers and inks. Ink dries quickly on the film. When overlaminated, it is warranted for medium term, outdoor weatherable graphics, and long term indoor graphics.

When constructed and used as described in this Bulletin, these types of graphics and end uses may be warranted by the 3M™ MCS™ Warranty. Please read the entire Bulletin for details.

- First surface images (the image is on top of the film) for opaque posters and signs, including:
 - Graphics for vans, personal vehicles, trucks and buses
 - Novelty posters
 - Retail and point-of-purchase displays
 - Information graphics such as maps and directories
 - Entertainment promotions in museums, zoos, parks, theatres, sports venues
 - Education and presentation graphics
 - Legal and courtroom exhibits
- For flat or simple curved surfaces, with or without rivets, used in vertical ($\pm 10^\circ$) applications

Limitations of End Uses

3M specifically does not recommend or warrant the following uses, but please contact us to discuss your needs or recommend other products.

Unsuitable End Uses for This Product

- Not for electronically cut individual letters and numbers
- Fleet applications in areas that use salt for winter road maintenance
- Application to non-warranted substrates, including wallboard
- Applications subjected to gasoline vapors or spills
- Application to corrugated or highly irregular surfaces or sharply raised areas
- Graphics applied to stainless steel, including stainless steel vehicles
- On flat surfaces with rivets, tenting of 4 to 10 mm around rivets may be expected; rivets may be cut around to eliminate tenting.
- Graphics made for automotive Original Equipment Manufacturers (OEM); contact 3M Automotive Division at 1-800-328-1684 for alternatives.

About Water-Based Inkjet Technology

Standard inkjet technology is water based. Water-based chemistry is susceptible to the extremes of heat and humidity. This is a factor in most product constructions on the market. Read the Fabrication, Shelf Life and Storage sections in this Bulletin. Staying in the middle of these ranges always provides optimum performance.

Compatible Products

3M Graphic Materials

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

This Bulletin provides details about the base film and construction options and warranty. Additional specific information about compatible products can be found in the Product and Instruction Bulletins listed in **3M Related Literature** at the end of this bulletin.

3M Graphic Materials

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

Film

- 3M™ Scotchcal™ Opaque Imaging Media 8522

Overlamine

- 3M™ Scotchcal™ Luster Overlamine 8519
- 3M™ Scotchcal™ Matte Overlamine 8520

Printers and Inks

HP Designjet Printers	HP Inks
<ul style="list-style-type: none">• 2500CP and 2000CP• 2800CP and 3800CP• 3500CP and 3000CP• HP Designjet 5000 and 5500	<ul style="list-style-type: none">• Designjet CP Ink System UV (pigment-based)• Designjet CP Inkjet System (imaging ink)
<ul style="list-style-type: none">• Z6100	<ul style="list-style-type: none">• HP 91 Vivera Ink System

Epson Printers	Epson Inks
<ul style="list-style-type: none">• Stylus Pro 9500• Stylus Pro 10000 printer• Stylus Pro 10600 printer	<ul style="list-style-type: none">• Archival Inks

Characteristics

These are typical values for unprocessed product; processing may change the values. Contact your 3M representative for a custom specification.

Characteristic	Description
Media	7 mil, white, opaque graphic film
Liner	Low-slippage, lay flat paper
Adhesive	Changeable, pressure sensitive
Thickness	Media with adhesive: 7.5 to 8 mil (nominal)
Warranted application substrates	See next page.
Application surfaces	Flat or simple curved surfaces, with or without rivets, used in vertical ($\pm 10^\circ$) applications (no corrugations)
Application temperature range	28° to 110°F (-2° to 43°C) (air and surface)
Removable	For up to one year; see Warranty Information

Characteristic	Description
Warranted application substrates	<p>Some substrates may "out-gas", resulting in tiny bubbles throughout the surface of the graphic. For maximum performance, be sure the substrate you select is properly cleaned and prepared as recommended by the manufacturer. See Instruction Bulletin 5.1 for additional information.</p> <ul style="list-style-type: none"> • Alodine (anodized aluminum) • Automotive panels (automotive painted steel) • Fruehauf (painted aluminum) • FRP (fiberglass reinforced plywood) • Glass • Imron® (polyurethane-painted metal panel) • Acrylic • Sintra™ board <p>Note: Use on any other substrate is strictly on a graphics manufacturer and customer test and approve basis. Test for both adhesion and removal characteristics. The plasticizer in some banner materials may migrate. This may cause the edge of the graphic to peel or lift off of the banner. For optimum performance, follow the guidelines in the section, Creating A Laminated Overlap, on page 4.</p>

Warranty Information

The warranty given in the Product Bulletin that is current at the time you purchased the film is the one that 3M will honor. **The warranties in the following table(s), given in years, are for finished graphics exposed in a vertical exposure in the United States except the Desert Southwest.** See the warranty sections following this table for additional information.

3M™ MCS™ Warranty Durability for Finished Graphics

Construction (film and overlaminate on warranted substrate)	HP Printers & Inks		Epson Printers & Inks		Removal
	Outdoor	Indoor	Outdoor	Indoor	
8522/8519	3 years	5 years	2 years	5 years	1 year without chemical strippers or tools
8522/8520					

Warranty and Limited Remedy


The following is made in lieu of all other express or implied warranties, including any implied warranty of **merchantability** or fitness for a particular purpose or implied warranty arising out of a course of dealing, custom or usage of trade: all 3M products are warranted to be free of defects in materials and manufacture at the time of shipment and to meet the specifications stated in this Product Bulletin. 3M will replace or refund the price of any 3M materials that do not meet this warranty within the specified time periods. These remedies are exclusive. **In no case shall 3M be liable for any direct, indirect, or consequential damages, including any labor or non-3M materials charges.**

See the Graphics Market Center Warranty Brochure, which gives the terms, additional limitations of the warranty, if any, and limitations of liability.

Graphic Construction Options

Opaque Graphics

Opaque graphics made with imaging media 8522 require an overlaminate and an opaque substrate.

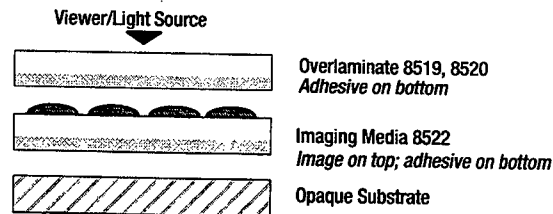

Fabrication

Shop Temperature

Acceptable: 60° to 95°F (15° to 35°C)
Optimum: 65° to 73°F (18° to 23°C)

Shop Humidity

Acceptable: 20% to 80%
Optimum: 45% to 60%

Condition the Media Before Use

These steps are especially important if you are operating outside the conditions recommended under Fabrication, above.

- Leave the media in its original packaging until you are ready to condition and use it.
- The day before you need it, remove the media from the box and remove the plastic.
- Condition the media for 24 hours in the same environment as the printer.

Printer Settings for Optimum Quality

Refer to your Hewlett Packard printer manual for detailed operating instructions.

The quality of a printed image depends on a combination of factors: correct media selection, printing software and raster imaging processor (RIP), shop conditions, etc.

The printers qualified to use this media have print mode options that are programmed specifically for these media. Current charts that show the various modes and printing dpi, and the quality results you can expect are available at www.hp.com under the website's support section. We recommend that you print the same image at all of these settings to determine acceptable print and productivity results.

The highest quality settings are usually desirable for backlit applications.

The correct media selection makes most other necessary adjustments to the printer.

- For the HP DesignJet CP 2000 or 3000 series printers, select the **Opaque Vinyl UV** setting.
- For the HP Designjet 5000 series printers, select the **3M Changeable UV** setting or the **HP Durable Gloss UV** or **HP Colorfast Vinyl** setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

- For the HP DesignJet CP 2000 or 3000 series printers, select the **Opaque Vinyl UV** setting.
- For the HP Designjet 5000 series printers, select the **3M Changeable UV** setting or the **HP Durable Gloss UV** or **HP Colorfast Vinyl** setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

Drying Guidelines

Usually, the media can be laminated within 10 minutes after printing. However, especially in high humidity conditions, we recommend waiting 15 to 30 minutes before laminating.


Use care when handling graphics that have not been laminated to avoid scratching and abrasion.

Graphics made with this media and ink combination typically may be wound directly on a take-up roll after printing.

Overlamine

Whether or not you want a warranted graphic, an overlamine is recommended to enhance durability, especially in outdoor applications.

FIGURE 1
Typical Laminator Thread-up

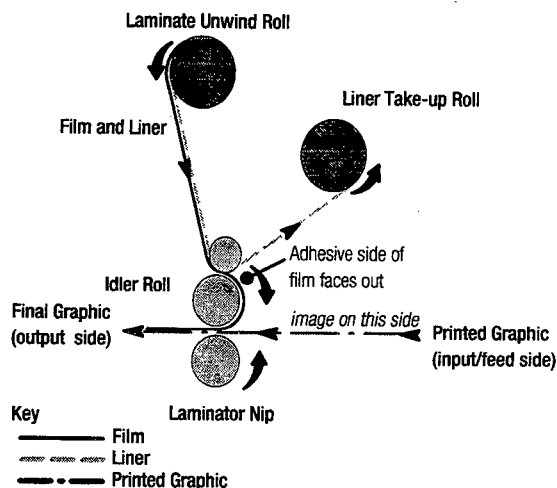


Creating a Laminated Overlap

Creating a laminated overlap helps ensure that the graphic does not peel or lift away from certain banner materials that may be subject to plasticizer migration. This method may also be used for flat, rigid or flexible sign applications.

1. Print the graphic as usual.
2. On all sides of the graphic, score *the film only* to the correct, final graphic dimension *without cutting through the liner*.

Weed away the excess film, leaving the bare liner exposed around the graphic. See FIGURE 2.

FIGURE 2
Trim and Weed Film Margin Only

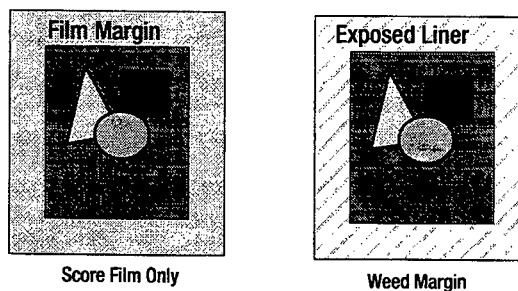

3. Laminate the graphic as usual (see page 5), making sure that at least one inch of the bare liner is covered by the laminate. See FIGURE 3.